


ColourDek hot dipped galvanised iron prepainted sheet JISG 3312 or unpainted galvanised iron sheet JISG 3302.

ColourDek metal roofing is most suitable for Industrial, Commercial and Residential Roofing where cost saving is an important factor and where long span is required.

ColourDek metal roofing is easy to fix and labour saving.

Effective Cover 760mm

- Notes:** 1. All dimensions in mm unless otherwise specified.
 2. Minimum recommended roof pitch is 3° (approximately 1 in 20)

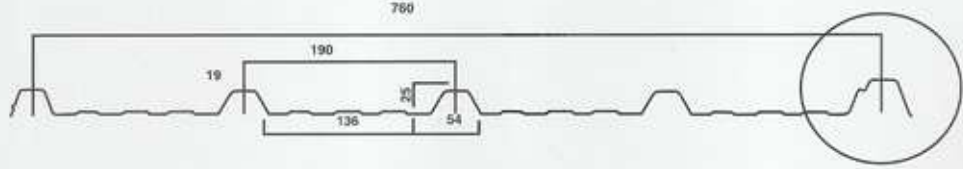

STANDARD MATERIAL SPECIFICATION


- Total coated thickness (mm)** - 0.23, 0.26, 0.30, 0.36, 0.43, 0.47
Base metal thickness (mm) - 0.196, 0.21, 0.25, 0.30, 0.38, 0.42
Zinc coating - Z18
Paint coating - Top: 5 microns epoxy prime
 20 microns polyester paint
 - Back: 10 microns service coat
Packing - In strapped bundles to order.
Steel grade - JIS G3312 - 1987
 - HighTensile, $T_s \geq 550N/mm^2$

- Cover Width** - 760 mm
Tolerance - Length : + 0-10 mm
 Cover width : $\pm 4mm$
 - Thickness: $\pm 0.02mm$
 mass and area vary accordingly
Length - Available in lengths according to customers requirements.
Gauge available - G35, G32, G30, G28, G26, G25
Flashings - Sizes and shapes can be made to specific designs.


RECOMMENDED MAXIMUM PURLIN SPACING

Gauge	TOTAL			ROOFS			WALLS		
	Thickness (approximate)	Mass	Area	Single Span	End Span	Interval Span	Single Span	End Span	Interval Span
	mm	kg/m ²	m ² /MT	mm	mm	mm	mm	mm	mm
25	0.47	4.60	217	1000	1000	1500	2000	2000	2000
26	0.43	4.20	238	1000	1000	1500	1800	1800	1800
28	0.36	3.30	303	800	800	1000	1500	1500	1500
30	0.30	2.80	357	500	500	800	1000	1000	1000
32	0.26	2.30	434	500	500	800	1000	1000	1000

CROSS SECTION

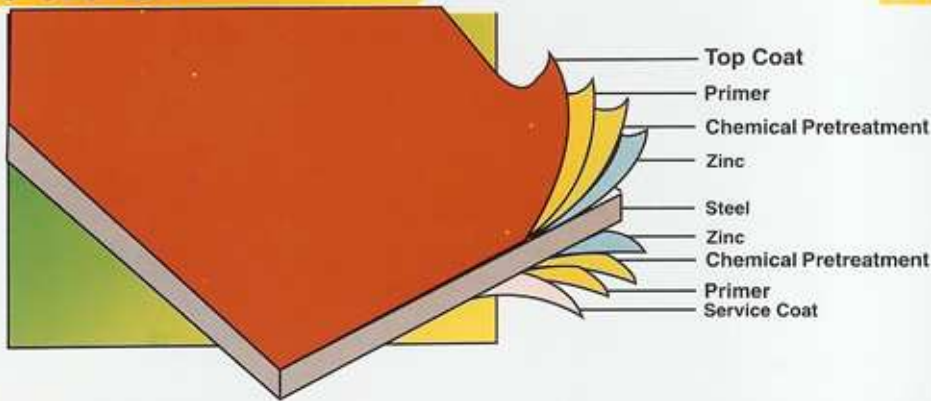

LAYING PROCEDURE

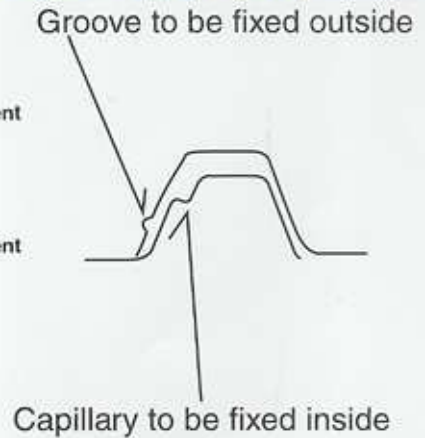

AVAILABLE COLOUR



亚洲钢铁贸易有限公司
Asia Wire Steel Marketing Sdn Bhd

(Co. No: 465683-P)

Lot 975, Batu 3, Jalan Kapar, P.O.Box 75, 41700 Klang, Selangor Darul Ehsan, Malaysia.
 Tel : +6 (03) 3342 5433/4/5, 3344 5175/6, 3342 7731 Telefax : +6 (03) 3342 0797

